



Your Television's Directions for Use



Read this manual first!

Congratulations on purchasing this Philips product.

We've included everything you need to get started.

If you have any problems, Philips Representatives can help you get the most from your new product by explaining:

- Hookups,
- First Time Setup, and
- Feature Operation.

Do not attempt to return this product to the store.

For fast help, call us first!
1-800-531-0039

Thank you for making Philips a part of your home!

Let's make things better.



PHILIPS

Table of Contents

Preface

1 Introduction

1.1	The Architecture	1-1
1.1.1	Addressing	1-2
1.1.2	Integer Data Types	1-2
1.1.3	Floating-Point Data Types	1-2
1.2	21264/EV68A Microprocessor Features	1-3


2 Internal Architecture

2.1	21264/EV68A Microarchitecture	2-1
2.1.1	Instruction Fetch, Issue, and Retire Unit	2-2
2.1.1.1	Virtual Program Counter Logic	2-2
2.1.1.2	Branch Predictor	2-3
2.1.1.3	Instruction-Stream Translation Buffer	2-5
2.1.1.4	Instruction Fetch Logic	2-6
2.1.1.5	Register Rename Maps	2-6
2.1.1.6	Integer Issue Queue	2-6
2.1.1.7	Floating-Point Issue Queue	2-7
2.1.1.8	Exception and Interrupt Logic	2-8
2.1.1.9	Retire Logic	2-8
2.1.2	Integer Execution Unit	2-9
2.1.3	Floating-Point Execution Unit	2-10
2.1.4	External Cache and System Interface Unit	2-11
2.1.4.1	Victim Address File and Victim Data File	2-11
2.1.4.2	I/O Write Buffer	2-11
2.1.4.3	Probe Queue	2-11
2.1.4.4	Duplicate Dcache Tag Array	2-11
2.1.5	Onchip Caches	2-11
2.1.5.1	Instruction Cache	2-11
2.1.5.2	Data Cache	2-12
2.1.6	Memory Reference Unit	2-12
2.1.6.1	Load Queue	2-13
2.1.6.2	Store Queue	2-13
2.1.6.3	Miss Address File	2-13
2.1.6.4	Destream Translation Buffer	2-13
2.1.7	SROM Interface	2-13
2.2	Pipeline Organization	2-13
2.2.1	Pipeline Aborts	2-16
2.3	Instruction Issue Rules	2-16



STEP 1

- Remove all items from inside of wash tub.
- Replace tub block and tape lid shut.
- Remember!** After installation is completed, the tub block needs to be removed.




STEP 2

- Lay two carton corner posts on the floor.
- Make sure one corner post is placed against the wooden crate bottom.
- Tip washer forward on its front so it will lay across both corner posts.



STEP 3

- Remove crate wires and crate base.




STEP 4

- Tip machine upright.
- Slide washer in place near water faucets.
- Prepare to hook up hoses.




STEP 5

Run water through both water faucets into a bucket to purge the water line particles that might clog the hoses. While running water through the faucets, determine which faucet is HOT water and place an identifying mark on it. Traditionally the HOT water faucet is on the



STEP 6

Insert one screen and then one washer into the faucet ends of the inlet hoses. The screens should be pointing out to fit properly.




STEP 7

Attach the inlet hoses to the HOT and COLD faucets. Being sure the hose marked "HOT" is attached to the HOT water faucet. Tighten by hand until snug and then 2/3 of a turn with pliers. **Do not overtighten.**

Attach the inlet hoses to the HOT and COLD connections on the back of the washer. HOT and COLD connections are identified by H & C stamped on the bracket, HOT on top, COLD on bottom. Be sure the hose marked "HOT" is attached to the HOT connection. Tighten by hand until snug and then 2/3 of a turn with pliers. **Do not overtighten.**

STEP 8

Turn on faucets and check for leaks at the faucets and at the machine connections. If leak occurs, check for cross-threaded or loose connections.

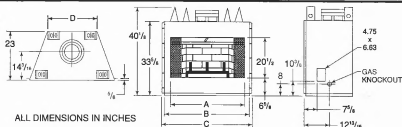

CAT. #	A	B	C	D
E36	36	41	43	25 1/2
E39	39	44	46	28 1/2
E42	42	47	49	31 1/2

HEARTH EXTENSIONS



CAT. #	A	B
HX5	46"	16"
HX6	49"	16"
HX7	60"	20"

GLASS DOORS




CAT. #	A
DM1036	35 1/2"
DM1039	38 1/2"
DM1042	41 1/2"

STRAIGHT ATTIC INSULATION SHIELD



AS8

INTEGRAL GRATES



 GR4
 GR5
 GR6

OUTSIDE AIR KIT



AK14

INSULATED DUCT



UNINSULATED DUCT



Overview

Übersicht

Vue d'ensemble

Buttons and Display (Model USB)

Tasten und Anzeige (Modell USB)

Boutons et affichages (Modèle USB)



Keyboard mode I Tastendrücken I Mode clavier I	1 Espresso 1 Espresso 1 Espresso	2 Espresso 2 Espresso 2 Espresso	1 Coffee 1 Coffee 1 Coffee	2 Coffees 2 Coffees 2 Coffees	Start/Stop dispensing Start/Stop Bohrung Commencer/arrêter le dosage
Keyboard mode II Tastendrücken II Mode clavier II	2 cups 2 Tassen 2 Tasses	1 Ristretto 1 Ristretto 1 Ristretto	2 Espresso 2 Espresso 2 Espresso	Coffee Coffee Coffee	Start/Stop dispensing Start/Stop Bohrung Commencer/arrêter le dosage

Buttons (Model S)

Tasten (Modell S)

Boutons (Modèle S)




Start/Stop dispensing
Start/Stop Bohrung
Commencer/arrêter le dosage



28/50 Please select	Normal Normal Normal	red fading rot erblühend détournement rouge	Heating Aufheizen Chauffage
28	During preparation Zubereitung läuft Préparation en cours	green grün vert	Preparation ready Zubereitung fertig Préparation prête
66°C	Steam Dampf Vapeur	blue blau bleu	Ready Bereit Prêt
Hot water (Hot) Heißwasser (Hei) Eau chaude (Hot)		blue blinking blau blinkend bleu (clignotant)	Preparation Zubereitung Préparation

Audio and Video Front Inputs are available for a quick connection of a VCR, to playback video from a camera, or attach a gaming device. Use the AV button on the remote control to tune these inputs.

- 1** Connect the video (yellow) cable from the Video output on the Camera (or accessory device) to the Video (yellow) Input located on the FRONT of the TV.
- 2** For Mono Devices: Connect one end of the audio cable from the Audio Out jack on the device to the Audio In (white) jack on the FRONT of the television.
- 3** Turn the TV and the accessory device ON.
- 4** Press the CH+ or CH- button on the remote control to tune the TV to the front input jacks. "Front" will appear on the TV screen.
- 5** Press the PLAY ► button on the accessory device to view playback, or to access the accessory device (camera, gaming unit, etc.).

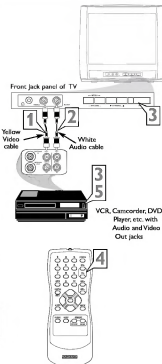

NOTE: For model 13MT1533
Audio sound is only available via the
headphone connection.

First things first

Usage Notes

Do:

- Turn off the product before cleaning.
- Use a soft cloth moistened with mild detergent to clean the display housing.
- Disconnect the power plug from AC outlet if the product is not being used for a long period of time.

Don't:

- Block the slots and openings on the unit provided for ventilation.
- Use abrasive cleaners, waxes or solvents to clean the unit.
- Use under the following conditions:
 - In extremely hot, cold or humid environments.
 - In areas susceptible to excessive dust and dirt.
 - Near any appliance that generates a strong magnetic field.
 - Place in direct sunlight.

Precautions

Follow all warnings, precautions and maintenance as recommended in this user's guide to maximize the life of your unit.



Warning:

- Do not look into the projector's lens when the light is on. The bright may hurt your eyes.
- To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.
- Please do not open or disassemble the product as this may cause electric shock.
- When switching the projector off, please ensure the projector completes its cooling cycle before disconnecting power.
- Turn on the projector first and then the signal sources.
- Do not use lens cap when projector is in operation.



Recyclable Paper

Important notes regarding operation



Danger: High voltage!

Do not remove the top cover as there is a risk of an electrical shock!

The video recorder does not contain any components that can be repaired by the customer. Please leave all maintenance work for qualified personnel.

As soon as the video recorder is connected to the power supply, there are some components that are in constant operation. To switch off the video recorder completely you must disconnect it from the power supply.



These operating instructions have been printed on non-polluting paper.

Deposit old batteries at the appropriate collection points.

Please make use of the facilities available in your country for disposing of the packaging of the video recorder in a way that helps to protect the environment.

This electronic device contains many materials that can be recycled. Please enquire about the possibilities for recycling your old device.



Make sure that air can circulate freely through the ventilation slots on the video recorder. Do not place the device on an unsteady base.

Make sure that no objects or liquids enter the video recorder. Do not place vases or the like on the video recorder. If liquid is spilt into it, immediately disconnect the video recorder from the power supply and call After-sales Service for advice.

Do not place any combustible objects on the device (candles, etc.).

Make sure that children do not place any foreign objects within the openings or ventilation slots.


Maintenance and Care

- **The hood must always be disconnected from the electricity supply before beginning any maintenance work.**

Cleaning the hood

- Clean the outside of the hood using a damp cloth and a solution of water and mild washing up liquid.
- Never use corrosive, abrasive or flammable cleaning products or products containing bleach.
- Never insert pointed objects in the motor's protective grid.
- Only ever clean the switch panel and filter grill using a damp cloth and mild washing up liquid.
- It is extremely important to clean the unit and change the filters at the recommended intervals. Failure to do so will cause grease deposits to build up that could constitute a fire hazard.


- Вставте болти, у плату/кронштейн та фіксатори і, за допомогою гайкового ключа надійно прикрутіть болти до монтажних гайок.



- Дотримуйтесь інструкцій, які додаються до VESA-сумісного настінного кронштейна.

3.3 Під'єднання кабелю антени

- Знайдіть роз'єм **TV ANTENNA**, який розташований з тильної сторони телевізора.
- Під'єднайте один кінець кабелю антени (не додається) до роз'єму **TV ANTENNA**. Якщо кабель антени не підходить, використайте адаптер.



- Під'єднайте інший кінець кабелю антени до виходу антени; перевірте, чи кабель надійно під'єднаний з обох кінців.


3.4 Під'єднання кабелю живлення

⚠ ПОПЕРЕДЖЕННЯ. Перевірте, чи напруга в мережі відповідає напрузі, вказаній на задній панелі телевізора. Не під'єднуйте кабель живлення, якщо значення напруги різняться.

Щоб під'єднати кабель живлення

ⓘ Примітка. Розташування роз'єму живлення відрізняється, залежно від моделі телевізора.

- Знайдіть роз'єм **AC IN**, який знаходиться на задній панелі або внизу телевізора.



- Під'єднайте кабель живлення до роз'єму живлення **AC IN**.
- Під'єднайте кабель живлення до мережі живлення і перевірте, чи кабель надійно під'єднаний з обох кінців.

1.5.2 Opening the Housing

1. Use the screw driver to unscrew the cover of the housing, as shown below.




Figure 1-12 Removing the Housing Screws

2. Push open the cover then gently lift it up until it detaches from the body frame.




Figure 1-13 Detaching the Top Cover

CD CHANGER PLAY

CD text information

CD text information is available only if the optional A/WA ADC-EX106 CD changer, which supports CD text, is connected to this unit and a CD with CD text is played on it.

Each time you press DISP, the display changes as follows.



* CD text information (disc title, track title) is displayed only when it is available.

CONNECTING A PORTABLE CD/MD PLAYER OR OTHER EQUIPMENT

This unit is equipped with a line-level input (CD/MD IN) jack, enabling high sound quality.



1 Connect a portable CD/MD player, etc. via the CD/MD IN jack (3.5-mm dia.) on the unit.

2 Start playback from the connected equipment.

The "CD IN" indication appears.


• For further information on the portable CD/MD player, etc., refer to the operating instructions for the equipment.

Notes

- Connecting a plug to the CD/MD IN jack cancels Radio, Tape Play and CD Changer Play mode and activates CD/MD IN mode. Disconnecting the plug cancels CD/MD IN mode and returns the unit to its former status.
- When the timer is activated (page 9), connecting a plug to the CD/MD IN jack does not switch the unit to CD/MD IN mode. Press DIR, CD, or BAND before connecting the plug to the CD/MD IN jack.

4.3 The Advanced Tab

The Advanced Tab allows you to access the advanced configuration functions for the Wireless Utility.



From this window, you may select the following:


- **Wireless Mode:** Choose to select 802.11b or 802.11g (Ad-Hoc mode only).
- **Power Saving:** This allows you to select the appropriate power-saving mode: **Normal**, **Maximum**, or **Off**.
- **Transmit Power:** This allows you to set the appropriate level of transmit power
- **Preamble Type:** Select either **Auto**, **Long Tx Preamble**, or **Short Tx Preamble**.
- **Country Domain:** Select the appropriate country of location.

The two levels on the bottom of the window also allow you to customize your *Fragmentation Threshold* and your *RTS/CTS Threshold*.

Turning the Projector On/Off

Turning on the Projector

- 1 Remove the lens cap. (Illustration #1)
- 2 Ensure that the power cord and signal cable are securely connected. The Power indicator LED will flash red.
- 3 Turn on the projector by pressing "Power" button on the control panel, and the Power indicator LED will turn blue. (Illustration #2)
- 4 Turn on your source (computer, notebook, video player, etc.). The projector will detect your source automatically.
 - If the screen displays "No Signal", please make sure the signal cables are securely connected.
 - If you connect to multiple sources at the same time, use the "Source" button on either control panel or the remote control or direct source key on the remote control to switch between inputs.



Installing the Microsoft® ActiveSync® software

The main function of the Microsoft® ActiveSync® software is to synchronise the information on your computer with the information on your handheld. Synchronisation compares the data on your handheld with your computer and updates the information on both locations. This will then serve as a backup data in case something happens to your handheld.

The following instructions tell you how to install the ActiveSync® software.

Important installation notes


- Before installing ActiveSync, make sure that your handheld cradle is not yet connected to your computer. Connect the cradle only after you have finished installing ActiveSync.
- If you don't have Microsoft® Outlook® 98 or later installed, please install Microsoft® Outlook® 2002 now. Even if you have Outlook 98 or Outlook 2000 installed, you are encouraged to upgrade to Outlook 2002.
- It is recommended that users install Outlook 2002 from this CD before installing ActiveSync.
- Do not copy the ActiveSync files to your computer's hard disk. You must use the Acer n30 Handheld Companion CD to place the files in their proper locations and to decompress the files.

To install the Microsoft® ActiveSync® software

- 1 Exit any open programs, including those that run at startup, and disable any virus-scanning software.
- 2 Insert the Acer n30 Handheld Companion CD into the computer's CD-ROM drive. The CD's welcome page appears.
- 3 Click the animated forward icon to go to the next screen.
- 4 Click the Start Here tab on the right side of the screen.
- 5 Read the instructions and installation notes indicated on the Start Here screen.
- 6 Click the buttons on the left pane to install each of the individual applications.
 - Outlook 2002 (recommended)
 - ActiveSync® 3.7.1

After installation, the ActiveSync icon  will appear on your computer's system tray (on the lower right-hand corner of the screen).

Refer to the ActiveSync software online Help for information on how to use the software. If at any time, you would like to restart this setup program, simply re-insert the CD into the CD-ROM drive.




Specifications are subject to change without notice.
"PHILIPS and the PHILIPS" Shield Emblem are registered trademarks of
Koninklijke Philips Electronics N.V. And are used under license from
Koninklijke Philips Electronics N.V."
www.philips.com

For WPA Settings:

WPA Step 4 Select **WPA-PSK** and the appropriate **Input Method** and click **Next**.



WPA Step 5 Enter the **WPA Key** (passphrase) and click **Next**.



NOTE: A higher recording sampling frequency brings better recording quality, but takes more memory space.

9. Press the STOP button, or select the "Exit" option in the Record settings menu to leave the Record settings menu and return to the Settings Menu.

Default

The Default option in the Settings menu enables you reset all settings on the Player to the factory defaults.

To access the "Default" function:

1. Access the Settings menu as outlined above.
2. Use the Skip to Next (or Skip to Previous) button to scroll through the Settings menu and select the "Default" option.



3. Press the MENU button to confirm your selection.
The Default settings will be loaded onto the Player.

Exit (Settings menu)

Use the "Exit" option in the Settings menu to leave the Settings menu and return to the Main Menu.

1. With the Settings menu in the LCD screen, use the Skip to Next (or Skip to Previous) button to scroll through the options until "Exit" is selected.
2. Press the MENU button to confirm your selection and return to the Main Menu.

Delete mode

The Delete options available in the Delete mode enable you to delete one particular specified track/file from the Player.

WARNING: Erased files CANNOT be recovered.

Chapter 2


Installation Overview

This chapter presents an overview of the installation and configuration procedure for Compaq ProLiant 3000 servers. For detailed discussions of rack installation, hardware option installation, and configuration, see the corresponding chapters in this guide. Topics in this chapter include:

- **Server Warnings and Precautions** - This section presents the precautions and warnings necessary to ensure safe installation of your server.
- **Pre-installation Planning** - This section discusses the power, grounding, and temperature requirements of the Compaq ProLiant 3000 server.
- **Installation Procedure** - This section is a summary of the steps you will follow to install your Compaq ProLiant 3000 server.

4. WIRING DIAGRAM

4-1. RAV-GM1101AT8*P*, GM1401AT8*P*

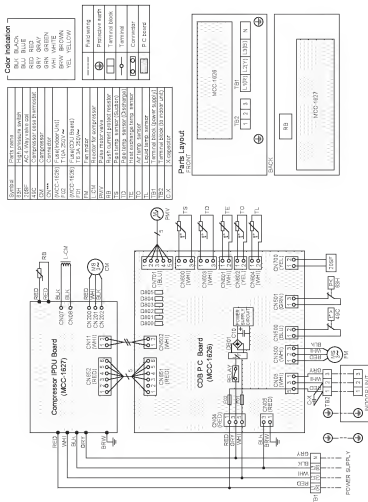




The MPEG-2 menu includes 7 profiles to choose from. Industry standard MPEG 2 DVD and SVCD profiles are included. Variable bit rate override can be manually selected.

The Following list explains each profile:


HP@H14	80Mbps, 1440*1152 (High Profile at High-1440)
HP@ML	20Mbps, 720*576
MP@HL	80Mbps, 1920*1152 (Main Profile at Main Level)
MP@H14	60Mbps, 1440*1152
MP@ML (DVD)	Encode MPEG files suitable for creating DVD. Default 6Mbps
MP@LL	4Mbps (Main Profile at Low Level)
MF@ML (SVCD)	Encode MPEG files suitable for creating SVCD. 2.5Mbps

MPEG 1 & 2 profiles create audio files that are MPEG 1, Layer 2 in specification with bit rate choices of 128 Kbit/sec and 224 Kbit/sec.



Video only: When selected, the encoder will only encode the video and not the audio.

TEAC SCHEMATIC DIAGRAM **RW-H300** POWER PCB, P SUB PCB, RED PCB, V SELECT PCB

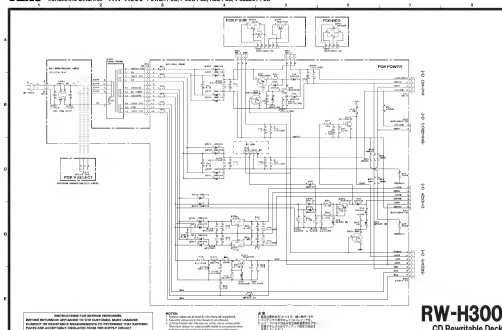

RW-H300
 CD Rewritable Deck
 1st Issue, May 2000

This chapter contains step-by-step procedures on how to disassemble the monitor for maintenance.

The tool for disassembly is as follows:

Screwdriver, hexagonal screwdriver, Putty knife.

Disassembly Procedure

1. Remove the hinge assembly.



2. Remove the rear cover and bezel.

The arrows in blue are the hook that we should put attention to when remove the rear cover. Use plastic putty knife to release hooks, then you can easily remove the rear cover.



Power-on problems flowchart

Server power-on problems flowchart

Some servers have an internal health LED and an external health LED, while other servers have a single system health LED. The system health LED provides the same functionality as the two separate internal and external health LEDs. Depending on the model, the internal health LED and external health LED may either appear solid or they may flash. Both conditions represent the same symptom.

For the location of server LEDs and information on their statuses, see the server documentation on the HP website (<http://www.hp.com/support>).

Symptoms:

- The server does not power on.
- The system power LED is off or amber.
- The external health LED is red, flashing red, amber, or flashing amber.
- The internal health LED is red, flashing red, amber, or flashing amber.
- The system health LED is red, flashing red, amber, or flashing amber.

Possible causes:

- Improperly seated or faulty power supply
- Loose or faulty power cord
- Power source problem
- Improperly seated component or interlock problem

Inspection

1. Clean gummy or dirty fuel tanks with Briggs & Stratton Carburetor Cleaner #100041 or #100042, or equivalent.
2. Inspect fuel tank for:
 - Corrosion
 - Leaks
 - Broken mounting brackets
3. Check fuel cap and filler neck for:
 - Proper seals
 - Vents
 - Functional quantity gauge (if equipped)
4. Check fuel filter for blockage of any kind.
5. Check fuel shut off valve for proper operation.

Clean or replace parts as required. Fuel filter replacement is recommended annually or any time the fuel system is serviced.

Installation

1. Install tank support to tank. Slip fuel hose under governor link and spark plug wire through hole in support as tank is installed. Torque screws to values listed in *Engine Specifications*.
2. Assemble shut-off valve and fuel filter, if equipped, to fuel hose.
3. Install hose assembly to tank fitting and carburetor fitting with new clamps.
4. Install control panel/trim plate. Torque screws to values listed in *Engine Specifications*.
5. Add small amount of fuel to tank, open shut off valve, and check for leaks. Repair as necessary.
6. Install air cleaner assembly.
7. Start engine and check for leaks. Repair as necessary.

Carburetor Service

LMT Carburetor

Two versions of this carburetor have been used (Figures 25 and 26).

These carburetors have a fixed high speed main jet with a screw for idle mixture and idle speed adjustment. The letters LMT are cast into the body of the carburetor while the identification numbers are stamped into the carburetor mounting flange next to the idle mixture screw or above the fuel inlet.




Figure 25




Figure 26

▲ WARNING Before servicing the carburetor or other fuel system components, drain all fuel from the tank and turn OFF the fuel valve (if equipped).
DO NOT attempt to stop the fuel flow by plugging the fuel hose.

PIZZA

This setting can be used for foods such as pizza where base browning and crispness are required. The top and lower elements operate in conjunction with the oven fan.

USING PIZZA



- The oven must be switched on before setting any cooking function or programme.
- Press the Oven Cavity selector  until the main oven cavity is illuminated.
- Press the Function selector  until the Pizza neon is illuminated. 
- Wait 5 seconds until your choice is confirmed. The temperature will automatically set to 150°C.
- If you wish to alter the set temperature, you may do so by pressing - or + until the required temperature setting is reached.
- To switch off a function simply press the Function selector once. The function neon will go out and the display will return to the time of day.

THINGS TO NOTE

- The oven light will illuminate.
- The heat indicator neons will flash until the oven has reached the desired temperature and then stop, an audible signal will sound. When the oven has been switched off the bars that are still lit indicate the remaining residual heat in the oven.
- If it is necessary to reach the required temperature in a shorter time, the Speedcook Function can be used. See Speedcook Function section.
- The cooling fan for the controls may operate after a time.
- If an automatic programme has been set, the oven fan and light do not come on until cooking begins.
- Some internal noise may be heard during operation. This is quite normal.

HINTS AND TIPS

- Single level cooking using the middle shelf position gives best results.
- Ensure that food is placed centrally on the shelf for maximum air circulation.
- Be guided by the cook times and temperatures given on any packaging.
- Some pizzas should be cooked directly on the oven shelf. To prevent soiling the oven base, place a baking tray in one of the lower shelf positions.



Do not place dishes, tins or baking trays directly onto the oven base as it becomes very hot and damage may occur.

- The material and finish of the baking trays and dishes used will affect base browning. Enamelware, dark heavy or non-stick utensils increase base browning. Shiny aluminium or polished steel trays reflect the heat away and give less base browning.

AEG Hausgeräte GmbH
Postfach 1036
D-90327 Nürnberg

<http://www.aeg.hausgeraete.de>

© Copyright by AEG

818 1433 – 01/5 - 1299

4.3 Assembly Procedures for V223PWL


- S1 Prepare a main board, a power board, and some essential cables. Connect every cable as the below picture



- S2 Prepare a speaker and a MAINFRAME. And then assemble speaker to MAINFRAME. Put the cable through the hole as below picture remarked in yellow circle. Pull the speaker rubbers to fasten them as below picture



- Turn over the circuit boards, use a Phillips-head screwdriver to tighten six screws (remarked in red circles) till the power board and main board with MAINFRAME are firmly attached
- S3



Maintenance

The projector needs little maintenance. You should keep the lens clean as dust, dirt or spots will project on the screen and diminish image quality. You will also need to clean the air filter located at the bottom of the projector periodically. It is important to keep the air filter clean because a clogged air filter prevents proper ventilation which is necessary to cool the projector and prevent it from overheating. The only part you should replace yourself are the lamp and the air filter. If any other parts need replacing, contact your dealer or qualified service personnel. When cleaning any part of the projector, always switch off and unplug the projector first.



.....

Warning: Never open any of the covers on the projector except the lamp and air filter covers. Dangerous electrical voltages inside the projector can cause severe injury. Except as specifically indicated in this Instruction Manual, do not attempt to service this product yourself. Refer all servicing to qualified service personnel.

Cleaning the Lens

Clean the lens whenever you notice dirt or dust on the surface. Wipe the lens surface gently with a soft, dry, lint-free cloth. To remove dirt or stains on the lens, moisten a soft cloth with water and a neutral detergent and gently wipe the lens surface.

Cleaning the Projector Housing

To clean the projector housing, first unplug the power cable. To remove dirt or dust, wipe the housing with a soft, dry, lint-free cloth. To remove stubborn dirt or stains, moisten a soft cloth with water and a neutral detergent. Then wipe the housing. Do not use alcohol, benzene, thinners or other chemical detergents as these can cause damage to the housing.

Cleaning the Air Filter

The air filter, which is located at the bottom of the projector, should be cleaned after every 100 hours of use. If it is not cleaned periodically, it can become clogged with dust and prevent the projector from being ventilated properly. This can cause overheating and damage the projector.

To launch the HP Onboard Administrator task:

1. Select an Enclosure or a Health Collection from views such as Enclosure State view, Health Collection view or Enclosure Diagram view.
2. Click **HP Onboard Administrator**.
3. Log in to HP Onboard Administrator.

HP Integrated Lights-Out task

Blade Servers in HP BladeSystem Enclosures include an Integrated Lights-Out management processor, which enables you to perform advanced, secure, and operating system-independent remote server management using a standard browser interface. The HP BladeSystem Management Pack 1.0 for System Center Essentials 2007 includes a task that collects HP Integrated Lights-Out management processor data and creates an associated browser link to remotely access the selected HP ProLiant Blade server.

To launch the HP Integrated Lights-Out task to display information:

1. Select a Device Bay from the Device Bay State view or by navigating to the desired bay using the Enclosure Diagram View.
2. Click **HP Integrated Lights-Out**.

Boards

This section describes how to remove and replace the hot-pluggable hard drive backplane board, the processor backplane board, memory modules, the system I/O board tray assembly, processor power module, processor chip, processor board, and expansion boards.

Drive Cage with Hot-Pluggable Drive Backplane Board




Figure 2-22. Removing the Cables from the Hot-Pluggable Drive Backplane Board

1. Remove the large access panel.
2. Disconnect the signal and power cables from the backplane board.

八、Insert the battery and cover the battery cover.



The process of assemble is over.

1. Not to remove any copyright or other proprietary notices from the Software;
2. To reproduce all such notices on any authorized copies you make; and
3. To use best efforts to prevent any unauthorized copying of the Software.

TRADEMARKS

This Agreement does not grant to you any rights in connection with any trademarks or service marks of Acer or of Acer's licensors or suppliers.

DISCLAIMER OF WARRANTIES

THE WEARABLE AND THE SOFTWARE MAY CONTAIN FUNCTIONS TO ENCOURAGE FITNESS. YOU ACKNOWLEDGE AND AGREE THAT THE WEARABLE AND THE SOFTWARE HAVE NOT BEEN DESIGNED AND DEVELOPED TO MEET YOUR INDIVIDUAL NEEDS, AND IS NOT INTENDED TO BE USED FOR MEDICAL OR DIAGNOSTIC PURPOSE. INFORMATION OR DATA DERIVED FROM THE SOFTWARE IS FOR FITNESS PURPOSE ONLY AND SHALL NOT REPLACE THE MEDICAL ADVICE OF YOUR PHYSICIAN OR HEALTH CARE PROVIDOR. YOU ARE PARTICULARLY AWARE THAT COUNTING OR CALCULATION ERRORS MAY OCCUR WHEN USING THE SOFTWARE AND THE WEARABLE.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ACER, ITS SUPPLIERS, AND ITS LICENSORS, PROVIDE THE SOFTWARE OR THE SERVICES "AS IS" AND WITH ALL FAULTS, AND HEREBY DISCLAIM ALL OTHER WARRANTIES AND CONDITIONS, EITHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES, DUTIES OR CONDITIONS OF MERCHANTABILITY, OF FITNESS FOR A PARTICULAR PURPOSE, OF ACCURACY OR COMPLETENESS OF RESPONSES, OF RESULTS, OF WORKMANLIKE EFFORT, OF LACK OF VIRUSES, AND OF LACK OF NEGLIGENCE, ALL WITH REGARD TO THE SOFTWARE AND THE PROVISION OF OR FAILURE TO PROVIDE SUPPORT SERVICES. ALSO, THERE IS NO WARRANTY OR CONDITION OF TITLE, QUIET ENJOYMENT, QUIET POSSESSION, CORRESPONDENCE TO DESCRIPTION OR NON-INFRINGEMENT WITH REGARD TO THE SOFTWARE.

THE SOFTWARE MAY INCLUDE LINKS OR ENABLE ACCESS TO CERTAIN THIRD PARTY WEBSITES AND/OR SERVICE (COLLECTIVELY, "THIRD PARTY SERVICES"). YOUR USE OF THIRD PARTY SERVICES MAY BE SUBJECT TO ADDITIONAL TERMS AND CONDITIONS REQUIRED BY THE THIRD PARTY OWNERS/LICENSORS OF SUCH SERVICES. CERTAIN CONTENT, INFORMATION, APPLICATIONS, OR MATERIALS MAY BE DISPLAYED OR MADE AVAILABLE ON OR THROUGH SUCH THIRD PARTY SERVICES (COLLECTIVELY, "THIRD PARTY MATERIALS"). THESE THIRD PARTY MATERIALS ARE NOT CONTROLLED BY ACER. YOU ACKNOWLEDGE AND AGREE THAT ACER DOES NOT ENDORSE AND IS NOT RESPONSIBLE FOR ANY THIRD PARTY SERVICES OR THIRD PARTY MATERIALS. THE LINKS OR ACCESS TO THIRD PARTY SERVICES AND THIRD PARTY MATERIALS ARE PROVIDED TO YOU SOLELY AS A CONVENIENCE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ACER DISCLAIMS ANY AND ALL WARRANTIES OR REPRESENTATIONS PERTAINING TO THIRD PARTY SERVICES OR THIRD PARTY MATERIALS.

EXCLUSION OF INCIDENTAL, CONSEQUENTIAL AND CERTAIN OTHER DAMAGES

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL ACER, ACER'S SUPPLIERS, OR ACER'S LICENSORS, BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, PUNITIVE, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF PROFITS OR CONFIDENTIAL OR OTHER INFORMATION, FOR BUSINESS INTERRUPTION, FOR PERSONAL INJURY, FOR LOSS OF PRIVACY, FOR FAILURE TO MEET ANY DUTY INCLUDING OF GOOD FAITH OR OF REASONABLE CARE, FOR NEGLIGENCE, AND FOR ANY OTHER PECUNIARY OR OTHER LOSS WHATSOEVER) ARISING OUT OF OR IN ANY WAY RELATED TO THE USE OF OR

Connecting rod large end

	Standard Value	Serviceable Limit
Wear	0.0015-0.0025 (0.004-0.014 in.)	Replace if over 0.6 (0.024 in.)
Clearance	0.001-0.002 (0-0.0005 in.)	Replace if over 0.05 (0.002 in.)

Connecting rod alignment

	Standard Value	Serviceable Limit
Parallelism		Replace if over 0.10 (0.004 in.)
Twist		Replace if over 0.15 (0.006 in.)

c. Reassembly

Check to make sure that the gasket and the two dowel pins are installed on the left crankcase before assembling the right crankcase to it. (Fig. 3-78)




Figure 3-78. Assembling R crankcase

3.5 TRANSMISSION

The transmission receives the rotation which has been transferred from the crankshaft to the main shaft and through a series of gears, changes it to the desired speed and then transmits it to the sprocket mounted counter shaft.

The C50, C50M, C65 and C65M have a 3 speed transmission, whereas, the S50 and S65 have a 4 speed transmission. (Fig. 3-79, 3-80)





Figure 3-79. Transmission construction detail



Low gear




Second gear



Neutral

○ rotates at same speed as main shaft
△ rotates at same speed as counter shaft



Top gear

Figure 3-80. Gearing arrangement for C50, C50M, C65, C65M

Traveling internationally with the computer

When you are moving from country to country.

Preparing the computer

Prepare the computer as you would normally prepare it for traveling.

What to bring with you

Bring the following items with you:

- AC adaptor
- Power cords that are appropriate for the country to which you are traveling
- Spare, fully-charged battery packs
- Additional printer driver files if you plan to use another printer
- Proof of purchase, in case you need to show it to customs officials
- International Traveler's Warranty passport

Special considerations

Follow the same special considerations as when traveling with the computer. In addition, these tips are useful when traveling internationally:

- When traveling in another country, check that the local AC voltage and the AC adaptor power cord specifications are compatible. If not, purchase a power cord that is compatible with the local AC voltage. Do not use converter kits sold for appliances to power the computer.
- If you are using the modem, check if the modem and connector is compatible with the telecommunications system of the country you are traveling in.

Благодаря нас вы приобретаете продукт Адап CS800 DLP. Наш продукт состоит из себя
удастей и использованным интерфейсом: мобильность и кроссплатформенную совместимость
позволяет просмотреть видеоматериалы из телефонов с Android и iOS, планшетов и
ноутбуков в любое время и в любом месте.

Установка приложения CS800

Посетите веб-сайт www.CS800.com/app чтобы загрузить приложение в CS800 для любой
поддерживаемой платформы.

На мобильных устройствах можно перейти в соответствующий раздел загрузки
отслеживая представленный ниже QR-код

(пользователи iOS могут найти приложение CS800 в App Store и загрузить его)

(пользователи Android могут найти приложение CS800 в Google Play и загрузить его)



Интерфейс приложения можно просмотреть прямо в браузере проигрывателя, когда включено
звучание. Первый скан может переключить экран. Не разрешайте детям смотреть в объектив
видеокамеры проигрывателя.

4 Licensing SMP

This section provides information about SMP licensing.

Licensing SMP

One license key is required for each successful P2P, P2V, V2P, or V2V migration. SMP licenses, unlike other ProLiant Essentials licenses, do not need to be deployed to servers.

SMP licenses are consumed after a successful migration.

For more information or to purchase licenses, see <http://www.hp.com/go/migrate>.

SMP licensing keys

To use P2P or SMP 2.x Subscription Keys in SMP, you must obtain a new license key from the HP Password Center. Before calling, have the following information available:

- Product number
- Product name
- Number of license remaining
- Number of days remaining

To determine the number of licenses or days remaining prior to migrating, choose one of the following procedures:

- P2P keys:
 1. Launch the P2P application station.
 2. Click the **License** tab.
 3. From the license key list, you can view the information.
- SMP 2.x keys:
 1. Log in to HP SIM.
 2. Select **Deploy**→**License Manager**→**HP Insight Server Migration software for ProLiant**.
 3. Click **Manage Licenses**.
 4. From the license key list, you can view the information.

Licensing requirements

- A P2P or V2P migration can only be performed if at least one valid P2P license or SMP license for X2P is available.
- A P2V or V2V migration can only be performed if at least one valid SMP license or SMP license for X2V is available.

Licensing options

The licensing key list on the **License** tab reports the numbers and types of SMP license keys available and enables you to enter new license keys.



The following types of SMP licenses are available for purchase:

- Subscription license—This type of SMP license enables the consumption of an unlimited number of migrations for one year. The subscription period begins after the first license is consumed.
- Demo license—This type of SMP license enables a specific number of migrations for a specific period. The subscription begins after the first license is consumed.
- Flexible Quantity license—This type of SMP license enables the consumption of a license from available license keys each time a migration is successful.


If several keys are installed, the licenses are processed in the following order:

Montage

Assembly

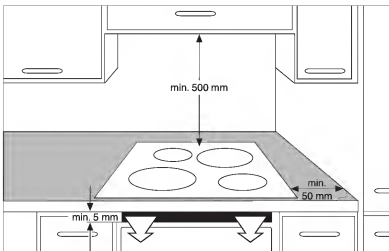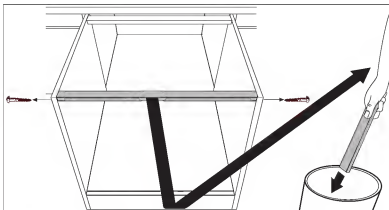

Power board

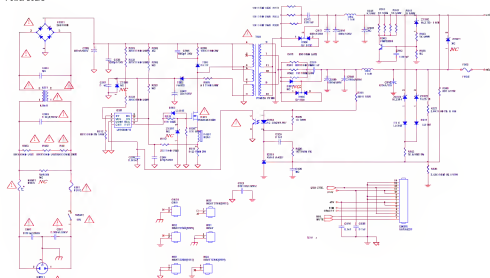

Compatibility modes

A. VGA Analog

1 VGA Analog - PC Signal

Modes	Resolution	V.Frequency [Hz]	H.Frequency [KHz]
VGA	640x480	60	31.5
	640x480	72	37.9
	640x480	75	37.5
	640x480	85	43.3
	640x480	120	61.9
5VGA	800x600	56	35.1
	800x600	60	37.9
	800x600	72	48.1
	800x600	75	46.9
	800x600	85	53.7
XGA	800x600	120	77.4
	1024x768	60	48.4
	1024x768	70	56.5
	1024x768	75	60.0
	1024x768	85	68.7
5XGA	1024x768	120	99.0
	1152x864	70	63.8
	1152x864	75	67.5
	1152x864	85	77.1
	1280x1024	60	64.0
QuadVGA	1280x1024	72	77.0
	1280x1024	75	80.0
	1280x960	60	60.0
	1280x960	75	75.2
	1400x1050	60	65.3
PowerBook G4	640x480	60	31.4
PowerBook G4	640x480	66.6 (67)	34.9
PowerBook G4	800x600	60	37.9
PowerBook G4	1024x768	60	48.4
PowerBook G4	1152x870	75	68.7
PowerBook G4	1280x960	75	75.0
i Mac DV (G3)	1024x768	75	60.0

External display devices

You can connect an external (VGA) monitor or projector to your computer's external display port. See the section entitled "Display" for information on using the computer's simultaneous display and multi-display features.

Use the Fn + F5 hot key to toggle the display setting between the computer's LCD panel and the external display device. See "Hot keys" for more information.

English

SERV PH LINE #1 (or 2)

Indicates telephone line trouble. Call your phone company from another phone to report telephone trouble. This message may not appear in some systems.

SERV PRINTER

Indicates that a local printer (if installed) at your premises is in a trouble condition. Check to be sure the printer is powered on, the paper is correctly inserted, and the printer is selected. Contact your security company if you have questions or the display doesn't clear. Your system may not include a local printer.

SERV PT BUS #

Displays when a problem has occurred with one of the panel's circuits. Call your security company.

ALARM SILENCED

This message is added to the scrolling alarm display when alarm sounders are silenced. Enter a valid passcode and press **ESC**, or arm the system to clear this message.

FIRE BYPASS

This display indicates that fire points have been bypassed.

24 HOUR BYPASS


This display indicates that 24-hour points have been bypassed.

External pointing device

Your computer features a sensitive touchpad pointing device with two click buttons and a scroll key. However, if you prefer to use a conventional mouse or other pointing device, you can connect it to one of your computer's USB ports.

English


TRACTOR - MODEL NUMBER 917.270430
BRIGGS & STRATTON ENGINE-MODEL NUMBER 28R707, TYPE NUMBER 1140-E1

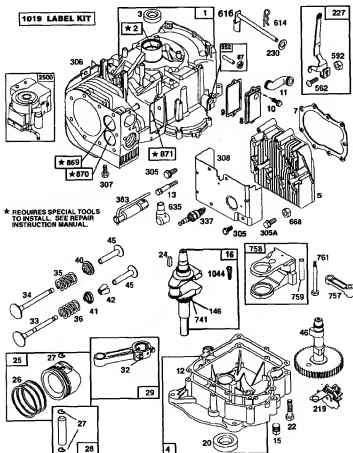

Uso del tuner incorporato

Premere contemporaneamente i tasti **Program Up** e **Program Down** – oppure entrambi i tasti a pedale – per più di mezzo secondo per entrare in modalità Bypass e Mute.

Suonate la corda d'apertura che desiderate accordare. Durante l'accordatura servitevi della seguente guida:



Accordare ad un pitch diverso da A=440

Girando la manopola VALUE durante l'uso del tuner, il display visualizza l'impostazione del riferimento del pitch del Bassfire, che è impostata a 440Hz (illustrata 68) per la nota A sopra alla C di mezzo. Il set di valori possibili per questa impostazione è da 35 a 45, che rappresentano 435Hz a 445Hz.

Accendendo e spegnendo nuovamente il Bassfire, il pitch di riferimento viene impostato nuovamente a 440Hz.

7-51-0170-A

I/O connectors	• Power socket x1 • VGA input x2 • Composite input x1 • S-Video x1 • VGA output x1 • HDMI x2 • DVI-D x1 with HDCP support • RS232 3-pin min dim jack x1 • USB x4 • 3.5 mm audio jack input x2 • 3.5 mm audio jack output x1 • SPDIF RCA jack output x1 • 3 RCA Component video x1 • 3.5 mm jack input x1 for wired IR remote control • RJ45 x1 • DC Jack x1
Standard package contents	• AC power cord x1 • VGA cable x1 • DVI-D cable x1 • Composite video cable x1 • Component cable (3 RCA) x1 • Remote control x1 • Battery x 2 (for remote control) • User's Guide (CD-ROM) x1 • Quick start guide x1 • Security card x1 • Carrying case x1 • Dust filter x1

* Design and specifications are subject to change without notice.

System Troubleshooting

This chapter provides instructions on how to troubleshoot system hardware problems.

Hardware Diagnostic Procedure

IMPORTANT: The diagnostic tests described in this chapter are only intended to test Acer products. Non-Acer products, prototype cards, or modified options can give false errors and invalid system responses.

1. Obtain the failing symptoms in as much detail as possible.
2. Verify the symptoms by attempting to recreate the failure by running the diagnostic tests or repeating the same operation.
3. Refer to "Power System check" and "Beep Codes" to determine which corrective action to perform.

Assembly and Disassembly (continue)

S13	Fix chassis		Thread lamp wire into the relevant hole of chassis like the attached Picture		
S14	Fix chassis		1)Fix chassis on the back of panel and front bezel 2)Put lamp wire and FFC wire in order as picture		
S15	Insert FFC cable		1. Tear off the adhesive tape of FFC wire. 2.Insert FFC wire into the interface of panel 3.Put FFC wire in order and paste them on the panel 4. Fix chassis on the back of panel		
S16	Insert light wire		1)Insert 4pcs light wire into the relevant position 2) put the balance light wire to the position as picture		

■ [Option] settings

Item	Functional Description
USB Mode 	Selects to choose one of the following modes for further settings. PC / PictBridge / PC CAM
TV 	Sets video output of the camera for matching the video output system of the equipment that you are going to connect to the camera. PAL / NTSC
LCD Brightness 	This sets the brightness of the LCD monitor screen. The adjustment range is from -5 to +5.
Auto Shut Down 	If no operation is performed for a specific period of time, the power to the camera is automatically turned off. This feature is useful to reduce battery wear. 2 Min. / 3 Min. / 5 Min. / Off
Mode-dial Help 	This enables/disables the Mode-dial Help function. When this function is activated, a brief mode guide appears on the LCD monitor as you rotate the mode dial to different modes.

2.4.3. Block Diagram




Fig. 1 Block Diagram of 7299SL Video

2.5 Circuit Descriptions

2.5.1 Preamplifier [LM1282]

The IC101, LM1282, is a high bandwidth preamplifier with OSD mixer. When CUT (OSD select) signal is low, video inputs are selected; when CUT signal is high, OSD inputs are selected.

The CONTRAST (and ABL) voltage controls the gain of three guns simultaneously. The R, G, B DRIVE voltage controls the gain of these three guns individually to approach the white balance of CRT.

The HCLAMP signal is used to fix the black level of video signals after AC couple. This is DC Restoration of the preamplifier.

The HBNK signal that is active low is used to pull the LM1282 outputs below 0.2V during non-display period.

2.5.2 CRT Driver [LM2405]

The IC102, LM2405, contains three wide-bandwidth cascode amplifiers. The parasitic capacitance and inductance between IC102 outputs and cathodes will also influence frequency response of IC102.


The diodes and series resistors between cathodes and IC102 output pins are used to protect IC102 during tube arcing.

2.5.3 Buffer [Q111,Q131,Q151]

There are two loads for IC101, one is IC102, another is IC1902. In order to minimize the loading effect on IC101, three emitter followers are inserted between IC101 and IC1901.

ENREGISTREMENT DE BASE

Cette partie explique comment enregistrer à partir du tuner, du lecteur de disques compacts ou d'un appareil externe.




Préparation

- Utiliser seulement des cassettes de type I (normales).
- Bobiner la cassette jusqu'à l'endroit où on veut démarrer l'enregistrement.
- Remarquer que l'enregistrement n'est fait que sur une face de la cassette.

1 Insérer la cassette à enregistrer dans la platine 2.

Insérer la cassette avec la face à enregistrer en premier orientée vers l'extérieur de l'appareil.



2 Appuyer sur une des touches de fonction (CD, TUNER, VIDEO/AUX ou MD) et préparer la source à partir de laquelle on veut enregistrer.

Pour enregistrer à partir d'un disque compact, appuyer sur CD et mettre le(s) disque(s) en place.

Pour enregistrer une émission de radio, appuyer sur TUNER et accorder sur une station.

Pour enregistrer à partir d'une source connectée, appuyer sur VIDEO/AUX ou MD.

3 Appuyer sur ● REC/REC MUTE pour démarrer l'enregistrement.



Quand la fonction sélectionnée est CD, la lecture et l'enregistrement démarrent simultanément.

Pour l'enregistrement à partir d'une source connectée, démarrer la lecture sur cette source.

Pour arrêter l'enregistrement, appuyer sur ■.

Pour mettre l'enregistrement en pause, appuyer sur II. (Applicable quand la source est TUNER, VIDEO/AUX ou MD.) Pour reprendre l'enregistrement, appuyer de nouveau sur cette touche.

Réglage du son pendant l'enregistrement

On peut faire varier librement le volume de sortie et la tonalité (BBE excepté) des enceintes ou du casque sans affecter le niveau de l'enregistrement.

INSERTION D'ESPACES BLANCS

L'insertion d'espaces blancs de quatre secondes permet l'utilisation de la fonction senseur de musique. (Applicable quand la source est TUNER, VIDEO/AUX ou MD.)

1 Appuyer sur ● REC/REC MUTE pendant l'enregistrement ou pendant le mode pause d'enregistrement.

REC/REC MUTE clignote sur l'échec pendant quatre secondes est un espace blanc de quatre secondes est inséré. Ensuite, la platine passe au mode pause d'enregistrement.

2 Appuyer sur II pour reprendre l'enregistrement.

Pour insérer un espace blanc de moins de quatre secondes, appuyer de nouveau sur ● REC/REC MUTE tandis que REC/REC MUTE clignote.

Pour insérer des espaces blancs de plus de quatre secondes, appuyer de nouveau sur ● REC/REC MUTE une fois que la platine passe au mode pause d'enregistrement. A chaque pression sur cette touche, un espace blanc de quatre secondes est ajouté.

Au sujet des cassettes

- Pour éviter un effacement accidentel, utiliser un tournevis ou tout autre objet effilé pour casser les ergots en plastique de la cassette après l'enregistrement.



Pour enregistrer de nouveau sur une cassette, recouvrir les cavités des ergots avec du ruban adhésif ou autre.

- Le ruban magnétique des cassettes de 120 minutes ou plus est extrêmement fin et se déforme et s'endommage facilement. Ces cassettes ne sont pas recommandées.

- Tendre le ruban magnétique avec un crayon ou un objet similaire avant d'utiliser une cassette. Un ruban magnétique tendu peut se rompre ou s'emmêler dans le mécanisme.



Pour effacer un enregistrement


S'assurer qu'aucun microphone n'est branché à cet appareil.

1 Insérer la cassette à effacer dans la platine 2 et appuyer sur TAPE DECK 1/2 pour attacher "TP 2".

2 Bobiner la cassette jusqu'à l'endroit où on veut démarrer l'effacement.


3 Appuyer sur ● REC/REC MUTE pour démarrer l'effacement.

1750 TXT DECODER

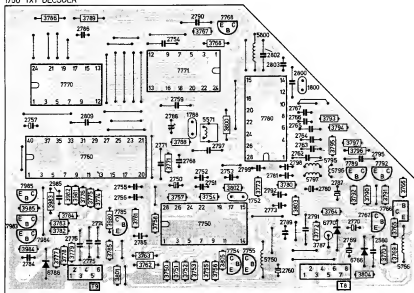


38 948 C12

1750 TXT DECODER

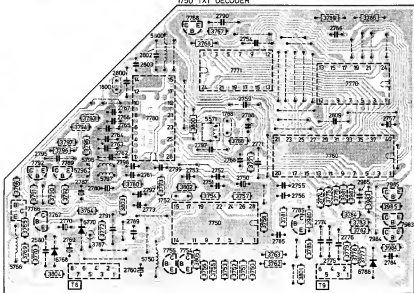

38 954 C12

REGLAGE DE L'HORLOGE



Quand on branche le cordon secteur pour la première fois, la touche **II SET** clignote.
L'alimentation étant coupée, régler l'heure comme décrit ci-dessous.

1 Appuyer sur la touche **II SET**.

Les heures clignotent.



2 Appuyer sur la touche **◀ DOWN** ou **▶ UP** pour spécifier les heures.

3 Appuyer sur la touche **II SET** pour régler les heures.

Les heures arrêtent de clignoter et les minutes se mettent à clignoter.

4 Appuyer sur la touche **◀ DOWN** ou **▶ UP** pour spécifier les minutes.

5 Appuyer sur la touche **II SET** pour régler les minutes et terminer le réglage.

Les minutes arrêtent de clignoter sur l'affichage et l'horloge démarre à 00 seconde.

Pour corriger l'heure courante

Appuyer sur la touche **POWER** pour mettre l'appareil hors tension. Appuyer sur la touche **II SET** et effectuer les étapes 1 à 5 ci-dessus.

Pour afficher l'heure courante

Appuyer sur la touche **CLOCK** de la télécommande. L'horloge est affichée pendant quatre secondes.

Toutefois, l'heure ne peut pas être affichée pendant l'enregistrement.

Pour passer au format de 24 heures

Appuyer sur la touche **CLOCK** de la télécommande puis appuyer sur la touche **■** dans les quatre secondes qui suivent.


Pour revenir au format de 12 heures, procéder de la même manière.

Si l'affichage de l'horloge clignote quand l'alimentation est coupée

Ceci est dû à une interruption d'alimentation. L'heure courante doit être réglée de nouveau.

Si l'alimentation est interrompue pendant plus d'environ 24 heures, tous les réglages mémorisés après l'achat doivent être faits de nouveau.

REGLAGE AUDIO SIMPLE



COMMANDE DU VOLUME

Tourner la commande **VOLUME** de l'appareil principal, ou appuyer sur les touches **VOLUME** de la télécommande.

Pour changer la balance gauche/droite


Tourner la commande **BALANCE**.

SYSTEME BBE

Le système **BBE** augmente la clarté du son aux fréquences élevées. Il enrichit aussi la fonction **KARAOKE** pour donner un son clair et agréable de la voix.

Appuyer sur la touche **BBE**.

A chaque pression sur cette touche, le niveau change. Sélectionner un des trois niveaux ou la position de repos, comme on préfère.




SYSTEME SUPER T-BASS

Le système **T-BASS** améliore le réalisme du son aux basses fréquences.

Appuyer sur la touche **T-BASS**.

A chaque pression sur cette touche, le niveau change. Sélectionner un des trois niveaux ou la position de repos, comme on préfère.



REMARQUE

Le son aux basses fréquences risque d'être déformé quand le système **T-BASS** est utilisé pour un disque ou une cassette dont le son aux basses fréquences est accentué d'origine. Dans ce cas, annuler le système **T-BASS**.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

CE Statement:

This equipment complies with EU radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

S58 Label for Device Label Certification Logo Size

Certification Logo Size

CE	Hearing Warning	WEEE	EAC	Recycling
				
NCC	ESD	FCC	NOM	
				

Code 編碼說明

Acer 22 Code SN : PPPPPPPPPYWWSSSSMMVV

PPPPPPPPPP : Acer PN

YWW : 3 numeric of Year & Week code

SSSSS : 5 unique hexadecimal code , by manufacture base & reset each week (0-9,A,B,C,D,E,F 16 Code)

MM : manufacture code

VV : Eng. Version code

Acer SNID : YWWdMMMMMM

YWW : 3 numeric of Year & Week code

dMMMM : 6 unique decimal number transfer from SSSSS of Acer 22_Code_SN.

Transfer rule for S1 S2 S3 S4 S5 :

DMMMM = S1 * 164 + S2 * 163 + S3 * 162 + S4 * 16 + S5

001FD → 00C509 (= 1 * 162 + 15 * 16 + 13)



MM : manufacture code (same as above MM)

特別說明：

只要出EU BAND (UMTS 900 / 1900 / 2100 MHz) – 請使用CE logo

只要出US BAND (UMTS 850 / 1900 / 2100 MHz) – 請使用FCC logo

SETTING THE TIMER

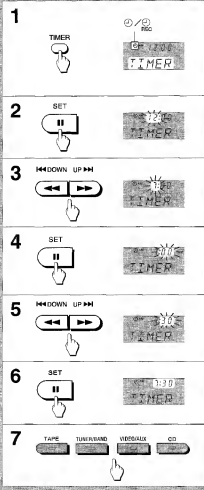


The unit can be turned on at the specified time every day by the built-in timer. You can also set timer recording from the radio or the connected equipment.

Preparation

- Make sure the clock is set correctly. (See page 22.)
- Note that the timer-on period is factory-set to 60 minutes. This period can be changed during timer setting.

1 Press the **TIMER** button to select timer playback mode or timer recording mode.

Each time it is pressed, or is displayed.



The **II SET** button lights, and **TIMER** and one of the source names flash alternately in the display for 4 seconds. Go to **step 2** within these 4 seconds. If **TIMER** in the display goes out, press the **TIMER** button again.

NOTE

If you proceed to step 2 after **TIMER** in the display goes out, another operation may start.

2 Press the **II SET** button.

The hour in the display flashes.

3 Press the **◀ DOWN** or **▶ UP** button to designate the hour of the timer-on time.

4 Press the **II SET** button to set the hour.

The hour stops flashing and the minute starts flashing in the display.

5 Press the **◀ DOWN** or **▶ UP** button to designate the minute of the timer-on time.

6 Press the **II SET** button to set the minute.

The minute stops flashing in the display.

TIMER and one of the source names flash alternately in the display for 4 seconds. Go to **step 7** within these 4 seconds to select a source.

7 Press one of the function buttons to select a source.

The selected source name and **TIMER** flash alternately in the display. After 4 seconds, **TIMER** in the display goes out and timer setting is completed.

If you selected the timer recording mode in step 1


Only the **TUNER** or **VIDEO/AUX** function can be selected.

If you press the **TUNER/BAND** button

The tuner function is selected, but bands cannot be selected in this step. Go to step 8, and select a band.

To be continued

DUPLICATION MANUELLE D'UNE CASSETTE



Préparation

- Bobiner la cassette jusqu'à l'endroit où on veut démarrer l'enregistrement.
- Le mode d'inversion est automatiquement réglé sur Σ . Remarque que l'enregistrement ne sera fait que sur une face de la cassette.

- 1 Appuyer sur la touche **TAPE**.
- 2 Insérer la cassette originale dans la platine 1 et la cassette à enregistrer dans la platine 2. Insérer chaque cassette avec la face à lire ou à enregistrer en premier orientée vers l'extérieur de l'appareil.
- 3 Appuyer sur la touche **DOLBY NR** pour mettre le réducteur de bruit Dolby hors service.
NR disparaît de l'affichage.
- 4 Appuyer sur la touche **TAPE/DECK 1/2** pour sélectionner la platine 1. TAPE 1 est affiché.
- 5 Appuyer sur la touche $\bullet$ **REC/REC MUTE** pour démarrer l'enregistrement.
La lecture et l'enregistrement démarrent simultanément.


Pour arrêter la duplication

Appuyer sur la touche $\blacksquare$.

Sélection du réducteur de bruit Dolby lors de la lecture de la cassette dupliquée

Appuyer sur la touche **DOLBY NR** pour mettre le réducteur de bruit Dolby en ou hors service, en fonction de la cassette originale.

DUPLICATION DE LA TOTALITE D'UNE CASSETTE



Cette fonction permet de faire des copies exactes des deux faces de la cassette originale. Les faces arrière des deux cassettes démarrent en même temps dès que la cassette la plus longue a été inversée.

REMARQUE

- La duplication ne démarre pas à un point situé au milieu d'une face.
- Le mode d'inversion est automatiquement réglé sur Σ .
- Le réducteur de bruit Dolby n'affecte pas l'enregistrement.

- 1 Appuyer sur la touche **TAPE**.
- 2 Insérer la cassette originale dans la platine 1 et la cassette à enregistrer dans la platine 2. Insérer chaque cassette avec la face à lire ou à enregistrer en premier orientée vers l'extérieur de l'appareil.
- 3 Appuyer une ou deux fois sur la touche **SYNC DUB** pour démarrer l'enregistrement.
 - ① Pour enregistrer à vitesse normale, appuyer une fois sur la touche de manière que N-DUB soit affiché.
 - ② Pour enregistrer à grande vitesse, appuyer deux fois sur la touche de manière que H-DUB soit affiché.

①



②



Les cassettes sont rebobinées jusqu'au début de leurs faces avant, puis l'enregistrement démarre.

Pour arrêter la duplication

Appuyer sur la touche $\blacksquare$.





Sélection du réducteur de bruit Dolby lors de la lecture de la cassette dupliquée

Appuyer sur la touche **DOLBY NR** pour mettre le réducteur de bruit Dolby en ou hors service, en fonction de la cassette originale.

REMARQUE

- Si l'égat de sécurité d'une face ou l'autre de la cassette est absent, l'enregistrement ne démarre pas.
- Si l'horloge de la cassette à enregistrer est plus longue que celle de la cassette originale, l'enregistrement sur la face arrière risque de s'arrêter en cours. Le cas échéant, dupliquer chaque face manuellement comme décrit à la partie "DUPLICATION MANUELLE D'UNE CASSETTE".

This diagram not available at time of service manual production



NOTE: SEE NOTE ON REVERSE OF THIS PAGE FOR WIRING DETAILS.



330 SUNDANCER ELECTRICAL SCHEMATICS

CABIN HARNESS
DRAWING NO. 09-811 (1 OF 2)
(FIG. 62.1)

